

MICROINVERTERS SPECIFICATION	
MICROINVERTER MAKE	AP SYSTEMS
MICROINVERTER MODEL NO.	DS3-L
MAXIMUM AC OUTPUT	768 W
MAX INPUT VOLTAGE	60 V
MAX AC CURRENT	3.20 A
MAX OUTPUT VOLTAGE	240 V

VISIBLE, LOCKABLE, LABELED DISCONNECT
WITHIN 10' OF UTILITY METER

NOTE :
ATTIC RUN - YES
SHUTDOWN - NO

PV MODULE RATING @ STC	
MANUFACTURER	ZNSHINESOLAR ZXM7-UHLD108-440/N
MAX. POWER-POINT CURRENT (IMP)	13.63 AMPS
MAX. POWER-POINT VOLTAGE (VMP)	32.30 VOLTS
OPEN-CIRCUIT VOLTAGE (VOC)	38.90 VOLTS
SHORT-CIRCUIT CURRENT (ISC)	14.39 AMPS
NOM. MAX. POWER AT STC (P _{MAX})	440 WATT
MAX. SYSTEM VOLTAGE	1500V
VOC TEMPERATURE COEFFICIENT	-0.25 %/°C

MODULE: (12) ZNSHINESOLAR ZXM7-UHLD108-440/N
INVERTER: (06) AP SYSTEMS DS3-L [240V]

Rooftop conductor ampacities designed in compliance with art. 690.8, Tables 310.15(B)(1), 310.15(C)(1), 310.15(B)(2), 310.16, Chapter 9 Table 4, 5, & 9. Location specific temperature obtained from ASHRAE data tables


RECORD LOW TEMP	-8°C
AMBIENT TEMP (HIGH TEMP 2%)	32°C
CONDUIT HEIGHT	7/8"
ROOF TOP TEMP	54°C
CONDUCTOR TEMPERATURE RATE	90°C

120% RULE	
BUS BAR RATING X 120%) - MAIN BREAKER RATING = MAX. PV OCPD	
(200A x 120%) - 200 = 40A	
THIS PANEL IS FED BY MULTIPLE SOURCES (UTILITY AND SOLAR)	
AC OUTPUT CURRENT	19A
NOMINAL AC VOLTAGE	240V

UTILITY SERVICE: UNDERGROUND
POINT OF INTERCONNECT, LOAD BREAKER
EXISTING 240V/200A BUS BAR RATING,
MAIN SERVICE PANEL, SINGLE PHASE,
WITH A 200A MAIN BREAKER
UTILITY COMPANY - PGE
UTILITY METER# 26 928 502

(12) ZNSHINESOLAR ZXM7-UHLD108-440/N
(06) AP SYSTEMS DS3-L [240V] INVERTERS
BRANCH 1 - 06 MODULES WITH 03 MICRO INVERTERS

BRANCH 2 - 06 MODULES WITH 03 MICRO INVERTERS

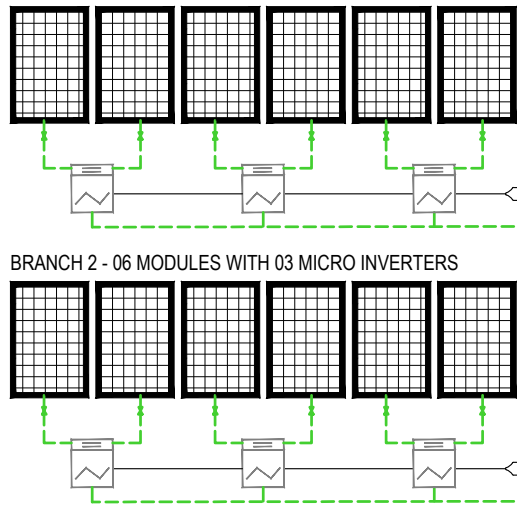


(N) JUNCTION BOX
600 V, NEMA 4
UL LISTED

(N) 125A COMBINER PANEL,
240V,3W,1-PHASE

(N) BLADE TYPE
NON-FUSIBLE AC DISCONNECT
NEMA 3R 30A-2P 120/240VAC
(VISIBLE, LOCKABLE, LABELED)

(N) PV BREAKER

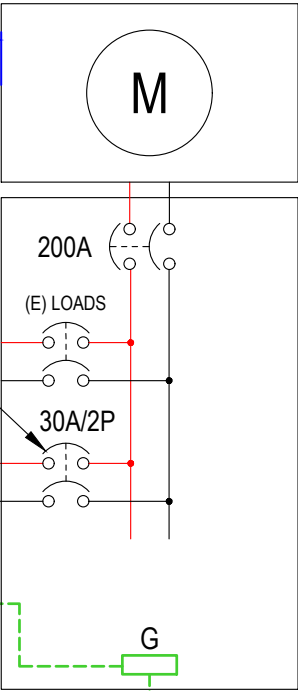

EXISTING
BI-DIRECTIONAL
UTILITY METER,
1-PHASE, 3W,
120V/240V

EXISTING GROUNDING
ELECTRODE SYSTEM

WIRE TAG #	MAX PARALLEL DEVICES		C.C RATING		PV CURR. MULT		TOTAL CURR	CONT. CURR X 125%	WIRE SIZE\TYPE\AMP.	WIRE OCP	#C.C.C.	CONDUIT	TEMP DE-RATE:		CONDUIT FILL:		WIRE AMP:	DERATED AMPACITY	MAX. CONT. CURRENT	GND	LENGTH FT. MAX	VOLTAGE DROP(%)	
①	03	x	3.20	x	N/A	=	9.60A	12.00A	#10\ THWN \ 40A @90°C	15A	2	TRUNK CABLE IN AIR	0.96	x	1.00	x	40A	38.40A	9.60A	#6 AWG	20	0.23	0.93<2
②	03	x	3.20	x	N/A	=	9.60A	12.00A	#10\ THWN \ 40A @90°C	15A	4	3/4" FMC / NMC IN AIR	0.96	x	0.80	x	40A	30.72A	9.60A	#10 AWG	40	0.57	
③	06	x	3.20	x	N/A	=	19.20A	24.00A	#10\ THWN \ 35A @75°C	30A	2	3/4" EMT	0.94	x	1.00	x	35A	32.90A	19.20A	#10 AWG	10	0.17	

INFINITY HOME SOLUTIONS
6405 E MILL PLAIN
VANCOUVER WA 98661
PHONE: 1-800-818-0598
INFINITY SOLAR.COM

REVISIONS		
Description	Date	Rev
Initial Design	6/16/26	00

Signature with Seal

Project Name & Address

KEVIN GONZALEZ RESIDENCE
925 N GRANT ST
LAFAYETTE, OR 97127
PHONE:- N/A
EMAIL:- N/A

Sheet Name
3-LINE
DIAGRAM

Sheet Size
ANSI B
11" X 17"

Sheet Number
E 1.1

